

Declaration of performance (DoP)

DoP-number: 3014001

Product name-type: TRANS LEVEL Model 3010 – 0,74 kN Top Mount
 TRANS LEVEL Model 3011 – 0,74 kN Side Mount
 TRANS LEVEL Model 4010 – 0,74 kN Top Mount
 TRANS LEVEL Model 5010 – 0,74 kN Top Mount
 TRANS LEVEL Model 6010 – 0,74 kN Top Mount
 TRANS LEVEL Model 6011 – 0,74 kN Top Mount

Manufacturer: OnLevel GmbH
 Budberger Straße 5
 46446 Emmerich am Rhein

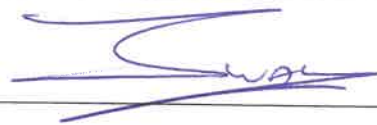
Application: Support construction for the benefit of a floor or stair secretion of glass

Essential characteristics	Performance	*AVCP level & notified body	hEN
Geometric tolerances	EN 1090-3		
Weldability	EN AW-6063 T6		
Fracture toughness	Not required for aluminium products	Systeem 2+ SKG-IKOB Certificatie BV FPC certificaatnr. 0960-CPR- SKGIKOB.010531 .01.NL	EN 1090-1
Resistance to shock loads	NPD		
Bearing capacity	Horizontal line load 0,74 kN/m		
Distortion in serviceability limit State	NPD		
Fatigue strength	NPD		
Fire resistance	NPD		
Reaction to fire	Class A1		
Release of cadmium	NPD		
Release of radioactive radiation	NPD		
Sustainability	NPD		
	Not equipped with coatings		

The performance of the product described above are in accordance with the declared performance.

This Declaration of performance is in accordance with Regulation (EU) No 305/2011 under the exclusive responsibility of the above listed manufacturer shall provide.

For and on behalf of the manufacturer signed by:

Name and function	Place and date of issue	Signature
CEO - I. Oude Luttikhuis	Emmerich am Rhein, 02-06-2025	

* Assessment and verification of the constancy of performance