

ONLEVEL



TL30**80**
SYSTEM FOR FRAMELESS
ALL-GLASS BALUSTRADES

TL-3080

0.5 kN Top Mount

Welcome to the era of lightness with the brand new Profile 3080! This piece is so light it almost floats - and it has more power than your morning coffee!


This model is the rebellious version of the popular 3010. It's not only lighter, but also cooler. The design is so fresh that it even amazes robots. And yes, we didn't just think about the outer beauty, but also about the inner values.

Specially developed to meet a wide range of requirements in the private sector:

- For fall protection indoors with a max. railing height of 1100 mm.
- The ideal solution for fall protection in private indoor areas.
- As a separating system for railings without fall protection to ensure maximum design flexibility.

Essential Features

- | Slimline, elegant design and low-maintenance
- | **ONLEVEL** FLEXFIT Glass Adjustment Tool
- | Cover (optional)
- | Extension pin channels
- | For use with Top Cover 2.0 kN
- | For glass thicknesses between 12 - 21.52 mm
- | Not suitable for mounting on wood

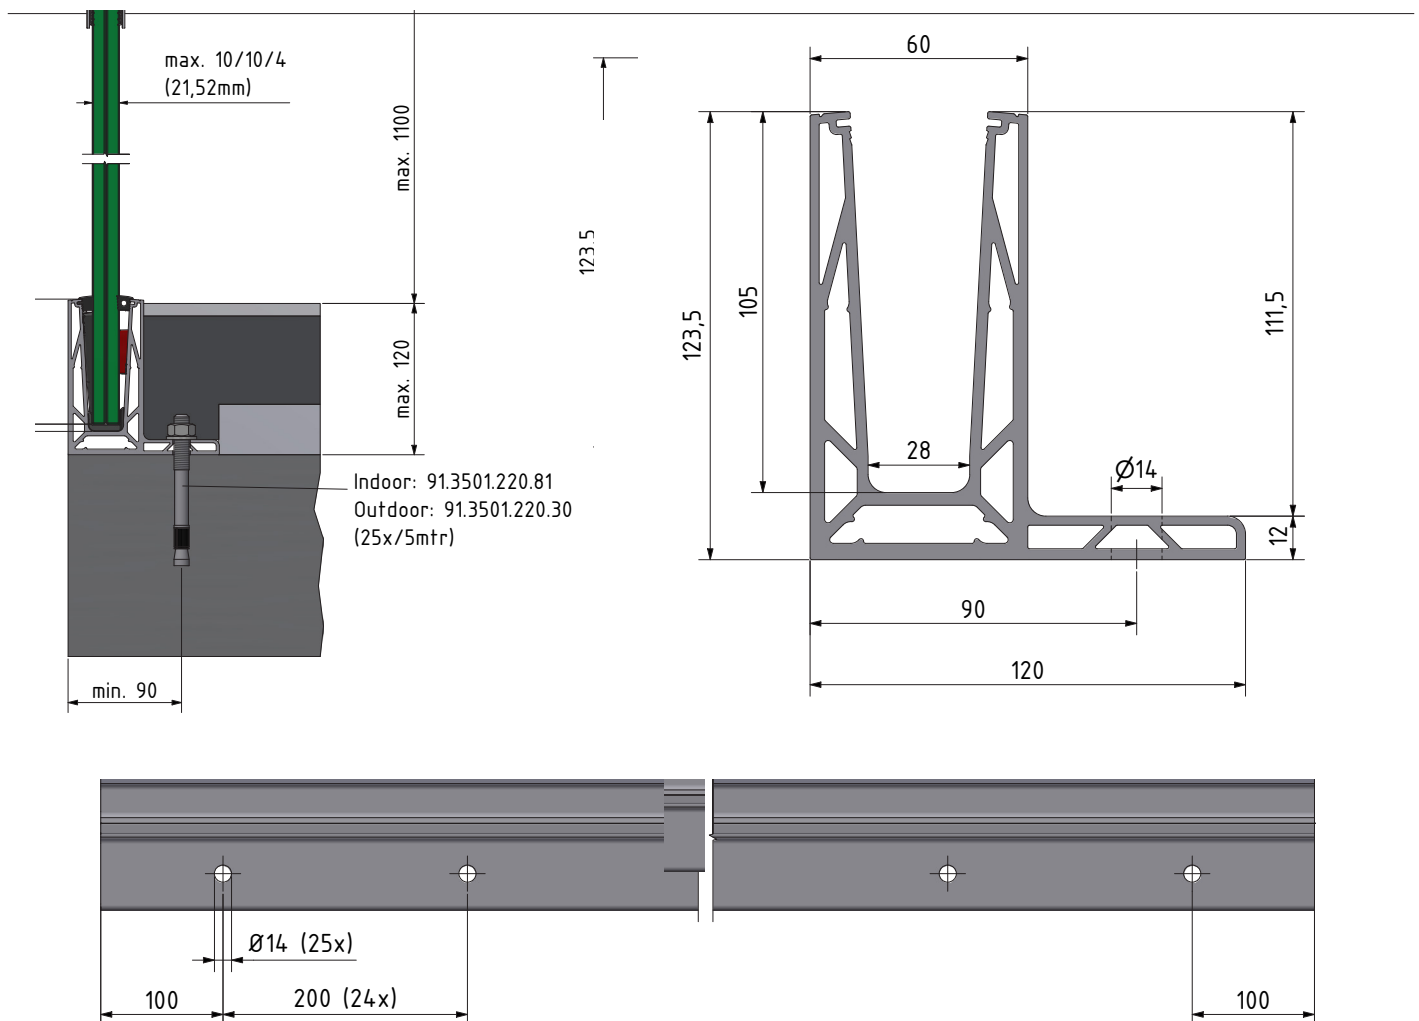

Lightweight profile –
therefore more economic

The glass can be adjusted
via the Flex-Fit system



Top mount




TL-3080 | 0.5KN TOP MOUNT

Glass profile




| Height: 124 mm
| Width: 120 mm
| Sales unit: 1 piece




Model 3080	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5mtr	10.3080.005.10	10.3080.005.11	10.3080.005.13/16/18/19

Inside corner 90°

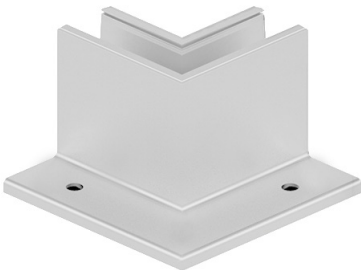

| Side length inside: 80 mm
| Side length outside: 200 mm
| Sales unit: 1 piece




Model 3080	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.3080.300.10	10.3080.300.11	10.3080.300.13/16/18/19

Outside corner 90°



| Side length inside: 80 mm
| Side length outside: 200 mm
| Sales unit: 1 piece




Model 3080	Mill finish	Plain aluminium	RAL coloured
	Art. no.	Art. no.	Art. no.
	10.3080.350.10	10.3080.350.11	10.3080.350.13/16/18/19

End cap, left




| For use on the left
| Sales unit: 1 piece




Model 3080	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
left	10.3080.400.10	10.3080.400.11	10.3080.400.13/16/18/19

TL-3080 | 0.5KN TOP MOUNT

End cap, right



- | For use on the right
- | Sales unit: 1 piece




Model 3080	Mill finish	Plain aluminium	RAL coloured
Application	Art. no.	Art. no.	Art. no.
right	10.3080.450.10	10.3080.450.11	10.3080.450.13/16/18/19

Fischer fixing anchor FAZ II 12/20



- | Finish interior application: Zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 2500 mm: 7 pieces
- | M12
- | Sales unit: 20 pieces




Model 3501	Zinc-plated steel (inside)	AISI 316 (exterior)
Art. no.	Art. no.	Art. no.
91.3501.220.81		91.3501.220.30

Mounting set for steel



- | Finish interior application: Zinc-plated steel (inside)
- | Finish exterior application: V4A (exterior)
- | Required number per 2500 mm: 7 pieces
- | M12 x 50 mm
- | Sales unit: 7 pieces




Model 3010	Zinc-plated steel (inside)	AISI 316 (exterior)
Art. no.	Art. no.	Art. no.
91.3010.050.81		91.3010.050.30

Extension pin



- | Length: 40 mm
- | Diameter: Ø 6 mm
- | Sales unit: 8 pieces




Model 7001	AISI 316 (inside & outside)
Art. no.	Art. no.
90.7001.640.31	

TL-3080 | 0.5KN TOP MOUNT

3.0 kN Top Cover, 3 mm



- | Width: 2 mm
- | 3.0 kN, and for the 6020 and 6021 profiles
- | Sales unit: 1 piece




Model 8030	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5000	90.8030.035.10	90.8030.035.11	90.8030.035.13/16/18/19

3.0 kN Top Cover, 10 mm



- | Width: 8 mm
- | 3.0 kN, and for the 6020 and 6021 profiles
- | Sales unit: 1 piece

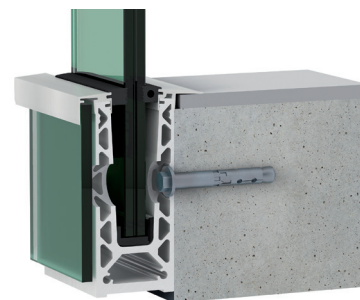

Model 8030	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5000	90.8030.105.10	90.8030.105.11	90.8030.105.13/16/18/19

3.0 kN Top Cover, 20 mm



- | Width: 18 mm
- | 3.0 kN, and for the 6020 and 6021 profiles
- | Sales unit: 1 piece



Model 8030	Mill finish	Plain aluminium	RAL coloured
Length	Art. no.	Art. no.	Art. no.
5000	90.8030.205.10	90.8030.205.11	90.8030.205.13/16/18/19

FLEXFIT 1.0 kN



- | Fine adjustment of glass panes
- | For glass thicknesses between 12 - 21.52 mm
- | Adjustment of up to 34 mm in relation to the vertical axis

Pay attention to the right glass thickness!


Length		2500 mm	5000 mm	25 mtr
Glass thickness	Wedge colour	Art. no.	Art. no.	Art. no.
12 mm	black	-	90.0505.112.00	-
6/6/2 (12.76 mm)	red	90.0502.113.00	90.0505.113.00	90.0525.113.00
6/6/4 (13.52 mm)	grey	-	90.0505.114.00	-
8/8/2 (16.76 mm)	red	90.0502.117.00	90.0505.117.00	90.0525.117.00
8/8/4 (17.52 mm)	green	90.0502.118.00	90.0505.118.00	90.0525.118.00
10/10/2 (20.76 mm)	red	90.0502.121.00	90.0505.121.00	90.0525.121.00
10/10/4 (21.52 mm)	green	90.0502.122.00	90.0505.122.00	90.0525.122.00

TL-3080 | 0.5KN TOP MOUNT

ONLEVEL Combi Tool



- | For FLEXFIT Glass Adjustment Tool
- | Zinc-plated steel

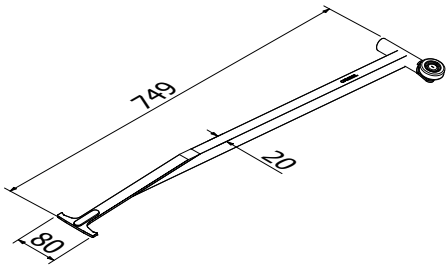

Model 0100	Art. no.
	90.0100.100.00



ONLEVEL

ONLEVEL Ltd. | Unit 7, Alexandria Court | Alexandria Drive
Ashton Commerce Park | Ashton-under-Lyne | Lancashire OL7 0QN | United Kingdom
T +44 0161 804 9500 | F +44 0161 804 9505 | info@onlevel-uk.com | www.onlevel.com